


## B-RING

The B-Ring is used as a sealing ring in conjunction with a clay socket to form a saddle on clay main sewers from DN 350.

The B-Ring is made of EPDM and is preformed to the drilled hole. After drilling, the hole has to be cleaned and filed and the B-Ring inserted, according to the marking. After that, the clay pipe fitting is pushed in, making sure that the clay pipe fitting does not intrude into the main sewer.

We suggest using Mücher Lubricant "blue" for clay pipes.

The B-Ring complies with the requirements of DIN EN 295-4.

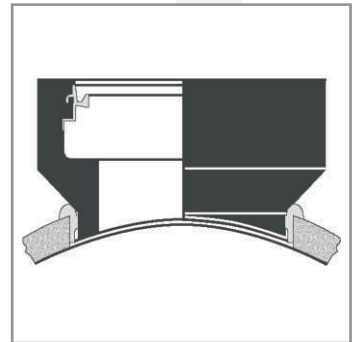

MÜCHER B-RING		
DN	Clay Main Sewer DN	Core Drill (mm)
150	350	200
200	400	257

