


## ÜP-RING

The ÜP-Ring is used to connect thin walled pipes (PVCu, Cast Iron, Ductile Iron, GRP, as well as EuroTop) to clay pipe sockets, with jointing system C.

The ÜP-Ring is a moulded ring, which is available from dimension DN 200 – DN 300.

The ÜP-Ring complies with the requirements of DIN EN 295-4.

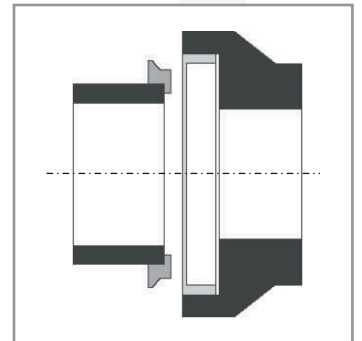

### MÜCHER ÜP-RING

DN	Cut Pipe End	Clay Pipe Jointing System C Normal / High Strength
200	PVCu (OD 200 mm)	N
200	Cast Iron (OD 210 mm)	N
200	Ductile Iron / GRP (OD 222 mm)	N
200	EuroTop to EuroTrad (OD 237 mm)	H/N
200	EuroTop to EuroTrad (OD 237 mm)	H/H
250	PVCu (OD 250 mm)	N
250	Cast and Ductile Iron (OD 274 mm)	N
250	EuroTop to EuroTrad (OD 296 mm)	H/N
250	EuroTop to EuroTrad (OD 296 mm)	H/H
300	EuroTop to EuroTrad (OD 357 mm)	H/N
300	EuroTop to EuroTrad (OD 357 mm)	H/H

