



FLEXIBLE ELBOW

- + 90° Elbow
- + For horizontal and vertical installations
- + Reliable and durable solution
- + Resistant to 0.5 bar


Flexible Elbow - for the repair of existing drains

The Flexible Elbow is used for the repair of existing drains and is suitable for flush-mounting and non-buried pipe connections.


The Flexible Elbow is made from a durable EPDM rubber and has a noise reducing impact on downpipes.




INSTALLATION

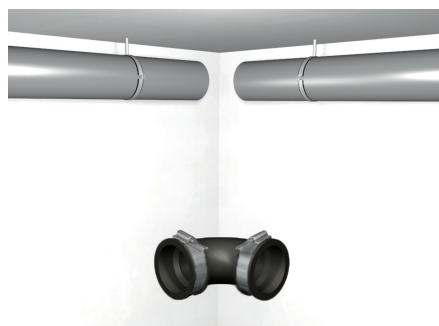

Cut off and remove pipe section. Loosen pipe support.

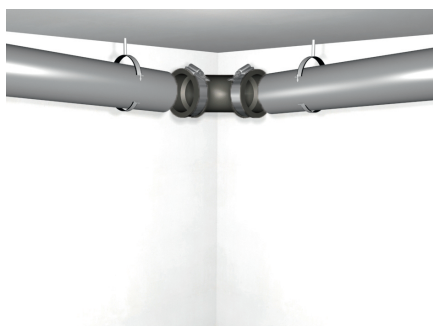


Position Flexible Elbow in between plain ended pipes.

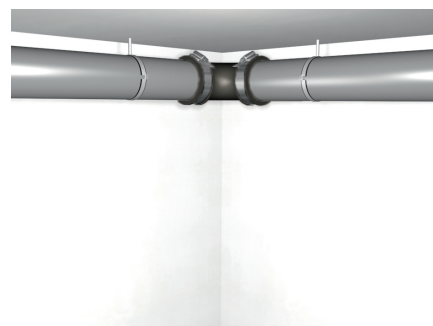

Insert plain ended pipes, tighten clamps and fix pipe support.

DESCRIPTION

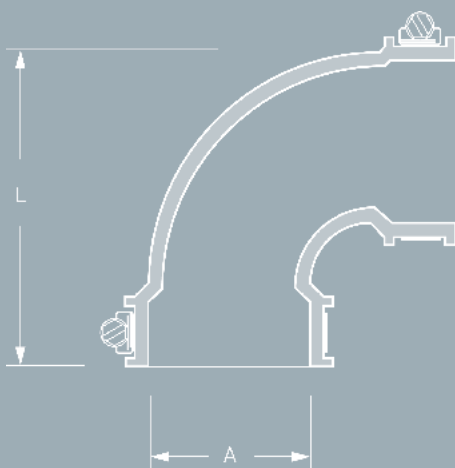

TECHNICAL SPECIFICATION

Flexible Elbow 90° for the repair of existing drains.

Pipe 1 DN/Material _____
Pipe 2 DN/Material _____

Article Number _____
___ Qty ___ Price/Unit ___ Total

Manufacturer: MÜCHER DICHTUNGEN®, D-50226 Frechen, T +49 2234 928 03-0, F-55
Pressure Tightness: 0.6 bar water / -0.3 bar vacuum
Sealing Material: EPDM rubber according to DIN EN 681-1
Stainless Steel: AISI 304/1.4301, alternatively AISI 316/1.4404 according to DIN EN 10088-2
Temperature Resistance: -40°C to +120°C, temporary max. temperature +160°C
Standard/Approval: DIN EN 681-1, CE16



PRODUCT RANGE

FLEXIBLE ELBOW						
Article Number	Reference	A Size Range (mm)	L Length (mm)	resistant to (bar)	Nm	Weight (kg)
500078	Flexible Elbow 50	40-50	95	0,6	6	0,10
500079	Flexible Elbow 60	50-60	140	0,6	6	0,20
500080	Flexible Elbow 90	78-90	190	0,6	6	0,50
500081	Flexible Elbow 118	106-118	210	0,6	6	0,80