## FLEXIBLE TEE

+ 90° Tee Junction to existing drains
+ For horizontal and vertical installations
+ Reliable and durable solution
+ Resistant to 0.5 bar

**Flexible Tee – for the connection to existing drains**
The Flexible Tee connects new to existing drains and is suitable for flush-mounting and non-buried pipe connections.

The Flexible Tee is made from a durable EPDM rubber and has a noise reducing impact on downpipes.

CE 16 DIN EN 681

CERTIFIED ISO 9001 UKAS MANAGEMENT SYSTEMS 001

## INSTALLATION

Cut off and remove pipe section. Loosen pipe support.

Position Flexible Tee in between plain ended pipes.

Insert plain ended pipes, tighten clamps and fix pipe support.

## DESCRIPTION

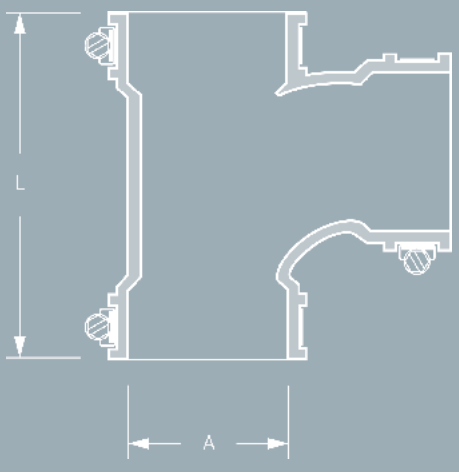


## TECHNICAL SPECIFICATION

Flexible Tee for the 90°Connection to existing drains.

| | | |
|---|---|---|
| Pipe 1 | DN/Material | _____ |
| Pipe 2 | DN/Material | _____ |
| Pipe 2 | DN/Material | _____ |
| Article Number | _____ | |
| | ____ Qty ____ Price/Unit ____ Total | |

| | |
|---|---|
| Manufacturer: | MÜCHER DICHTUNGEN®, D-50226 Frechen, T +49 2234 928 03-0, F-55 |
| Pressure Tightness: | 0.6 bar water / -0.3 bar vacuum |
| Sealing Material: | EPDM rubber according to DIN EN 681-1 |
| Stainless Steel: | AISI 304/1.4301, alternatively AISI 316/1.4404 according to DIN EN 10088-2 |
| Temperature Resistance: | -40°C to +120°C, temporary max. temperature +160°C |
| Standard/Approval: | DIN EN 681-1, CE16 |

## PRODUCT RANGE

| FLEXIBLE TEE | | | | | | |
|---|---|---|---|---|---|---|
| Article Number | Reference | A<br>Size Range (mm) | L<br>Length (mm) | resistant to<br>(bar) | Nm | Weight (kg) |
| 500074 | Flexible Tee 50 | 40-50 | 125 | 0,6 | 6 | 0,20 |
| 500075 | Flexible Tee 60 | 50-60 | 125 | 0,6 | 6 | 0,30 |
| 500076 | Flexible Tee 90 | 78-90 | 200 | 0,6 | 6 | 0,60 |
| 500077 | Flexible Tee 118 | 106-118 | 245 | 0,6 | 6 | 1,10 |